

3 PCS DESIGN BALL VALVE FULL BORE

3 PARÇALI TAM GEÇİŞLİ KÜRESEL VANA



VTKF-16-25-40

Pressure Rate / Basınç Aralığı: PN16-25-40

Size Range / Ölçü Aralığı: DN15-DN150

Flange Ends / Flanş: DIN EN 558-1/1

Test: EN 12266

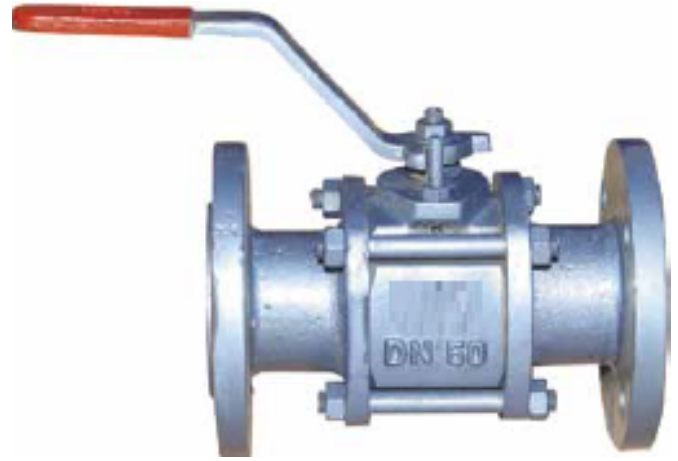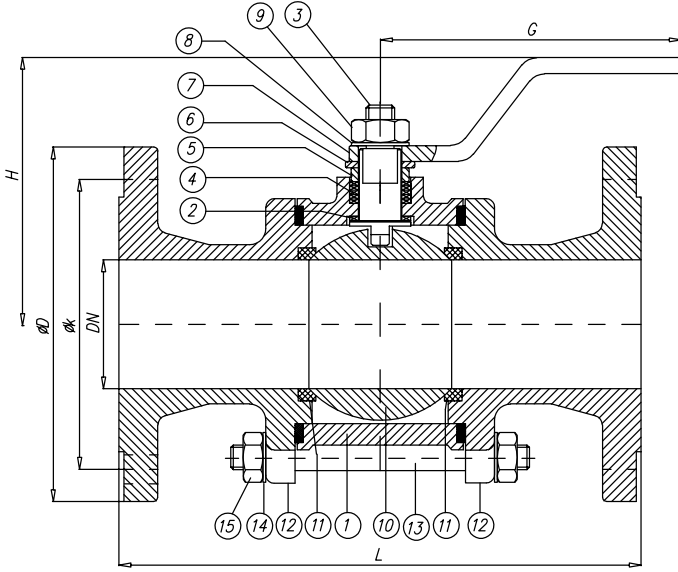

NO	PART NAME	PARÇA ADI	MATERIAL / MALZEME	NO	PART NAME	PARÇA ADI	MATERIAL / MALZEME
1	Body	Gövde	GG 25 / GGG-40 SS / GS-C 25 / Bronze	9	Nut	Somun	5 D/SS
2	Gasket	Conta	PTFE	10	Ball	Küre	AISI 304 / AISI 316 / Bronze
3	Stem	Mil	AISI 304 / AISI 316	11	Seat	Ring	PTFE
4	Gasket	Conta	PTFE	12	Flange	Flanş	GG 25 / GGG-40 SS / GS-C 25 / Bronze
5	Gland Bush	Baskı Burcu	Ms 58 / AISI 304	13	Stud	Saplama	5.6 / SS
6	Stopper	Hareket Pulu	St 37 / AISI 304	14	Washer	Rondela	St 37 / AISI 304
7	Lever	Kol	St 37 / AISI 304	15	Nut	Somun	5 D/SS
8	Washer	Rondela	St 37 / AISI 304				

6
Ball Valves

Nominal Diameter / Anma Çapı	DN	15	20	25	32	40	50	65	80	100	125	150
Valve Dimensions / Vana Boyutları DIN EN 558-1-1 DIN EN 558-1-1-27 DIN 3357-2	L	130	150	160	180	200	230	290	310	350	400	350
	G max.	160	180	180	250	300	320	350	450	500	700	700
	H max.	95	110	115	130	135	145	155	195	220	265	300
Flange Dimensions / Flanş Ölçüleri DIN EN 1092-1-2 PN 10-16	D	95	105	115	140	150	165	185	200	220	250	285
	k	65	75	85	100	110	125	145	160	180	210	240
Flange Dimensions / Flanş Ölçüleri DIN EN 1092-1-2 PN 25	D	95	105	115	140	150	165	185	200	235	270	300
	k	65	75	85	100	110	125	145	160	190	220	250
Flange Dimensions / Flanş Ölçüleri DIN EN 1092-1-2 PN 40	D	95	105	115	140	150	165	185	200	235	270	300
	k	65	75	85	100	110	125	145	160	190	220	250
Weight / Ağırlık	kg	2,3	3,8	4	6,5	8,55	13,55	20,15	29,5	40,3	68	86