

VWTD-10-16-25

WAFFER TILTING DISC CHECK VALVE

WAFFER TİLTİNG DİSK ÇEK VALF



Pressure Rate / Basınç Aralığı: PN10-16-25

Temperature / Sıcaklık: -10....+120 oC

Flange Ends / Flanş: DIN EN 1092,

DIN EN 12266 & API 598 Tests

DIN EN 558-1-16

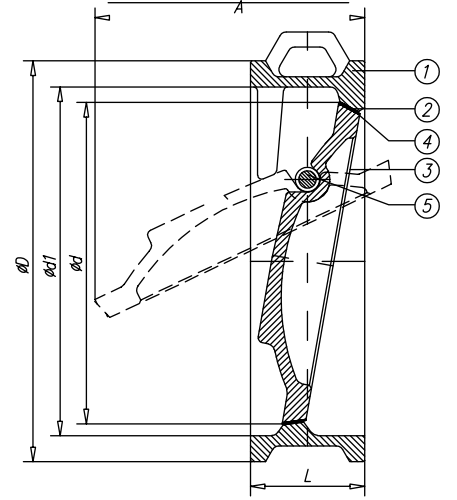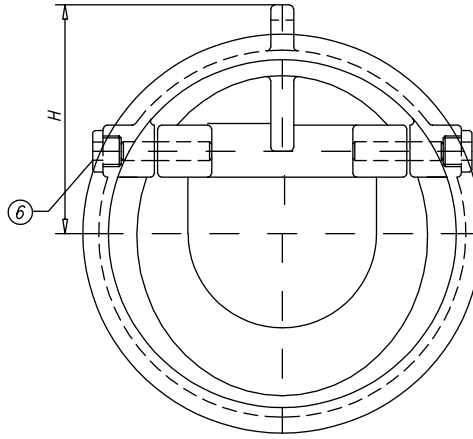

NO	PART NAME	PARÇA ADI	MATERIAL / MALZEME
1	Body	Gövde	GG 25 / GS-C 25/AISI 304/316 / Bronze
2	Body Seat	Gövde Siti	Welded 13 Cr, Stellite 6 or 21
3	Disc	Klape	AISI 304 -316 / Bronze / Cast Steel
4	Disc Seat	Klape Siti	Welded 13 Cr, Stellite 6 or 21
5	Trim	Mil	AISI 304 -316
6	Plug	Tapa	AISI 304 -316

Nominal Diameter Anma Çapı DN	ØD						Nominal Pressure / Anma Basıncı			Weight Ağırlık kg
	Ød	Ød1	ØA	H	L		PN 10	PN 16	PN 25	
40	34	40	45		33		94	94		0,8
50	44	50	54		43		109	109		1
65	58	65	64		46		129	129		2
80	72	80	85		64		144	144		3
100	90	100	95		64		164	164		4,5
125	112	125	115		70		194	194		6,5
150	135	150	135		76		220	220		7,5
200	180	200	220	155	89		275	284		15
250	225	250	220	182	114		330	330	343	26,5
300	270	300	250	210	114		380	386	403	33,5
350	315	350	295	240	127		440	446	460	54
400	365	400	340	275	140		491	498	515	66
450	410	450	370	300	152		541	558	565	92
500	460	500	405	325	152		596	620	625	110
600	555	600	500	390	178		698	735	732	178
700	650	700	616	460	229		808	808	834	245
800	745	800	670	515	241		915	915	942	385
900	835	900	750	562	241		1018	1112	1042	445
1000	930	1000	760	625	300		1125	1130	1155	780